



OMEGA Liquid Waste Solutions Patented Technology

OMEGA Liquid Waste Solutions inc. has developed self-cleaning filtering core technologies that thrust mobile equipment used for sewer, septic tank and grease trap cleaning to the next level with the ability to recycle water.

OMEGA SG™ (Septic & Grease) and OMEGA SC™ (Sewer Cleaner) FILTER SERIES possess state-of-the-art double high-speed counter-rotating self-cleaning filtration membranes. The OMEGA SG™ and OMEGA SC™ FILTER SERIES are mechanical liquid-solid separation filters resistant to abrasion and will not clog in high grease concentration applications.


OMEGA's best-in-class mechanical liquid-solid separation cores are supported by our experienced team to assist you with the integration of the system to meet your particular design and operation parameters. If you are in the concept stage of new projects, do not hesitate to discuss your application with our experts since our team's experience extends beyond filtering.



Key Features:

- 100 or 500-micron “absolute” filtration options;
- Continuous filtration system;
- Self-cleaning system prevents clogging;
- Excellent for high grease concentration applications;
- Allows the liquid to be recirculated in standard pumps requiring ultra-fine filtration;
- Does not affect bacterial flora;
- Eliminates the use of chemicals, environmentally friendly;
- SST components or parts reduces wear & tear and extends filter life;
- Compact and lightweight system;
- Simple, straight forward, seamless integration for retrofit or new unit installations.

OMEGA SC Filter Series™ — Sewer Cleaner

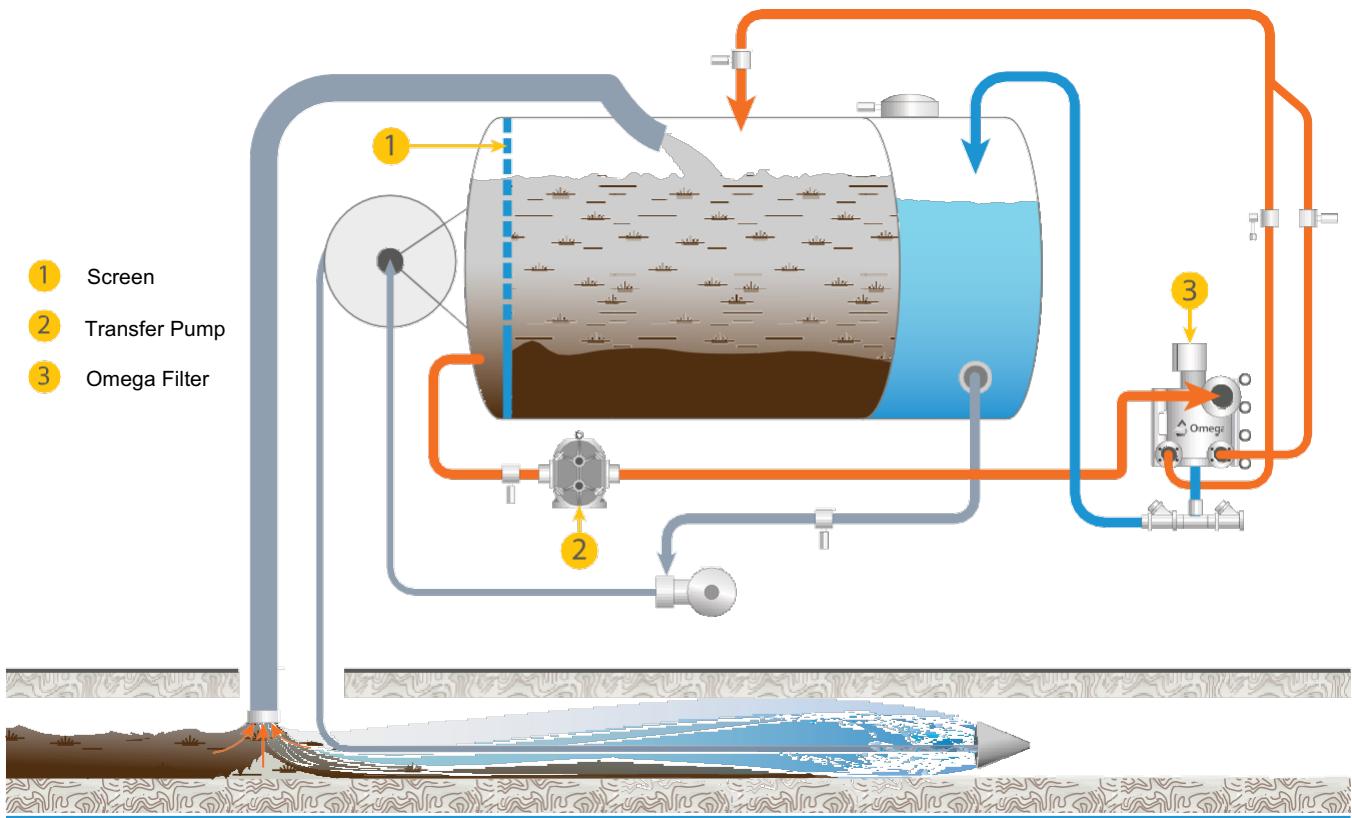

CITY SEWER AND STORM LINE APPLICATIONS

OMEGA SC-100™ and OMEGA SC-500™ filters are self-cleaning and will not clog in sewer applications, where high concentrations of fiber, hair or grease are present.

Storm lines collect all types of dirt and debris such as gravel, sand, branches, etc., making it hard on your equipment. OMEGA SC-100™ and SC-500™ are entirely made of high-grade stainless steel; they will take anything you throw at them and remain in perfect shape for years.



The clarified/recycled water from the storm or sewer lines can be re-used to supply the jetter pump to continue the cleaning process seamlessly.

Recycling water, combined with more space for solids, allows for a full day's operation without refilling the fresh water tank or emptying the debris tank – not to mention the environmental impact of recycling thousands of gallons of water per day.



The Omega filtration unit is easy to access through the side panel.

OMEGA SG Filter Series™ — Septic & Grease

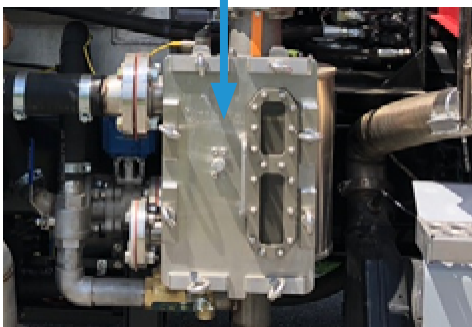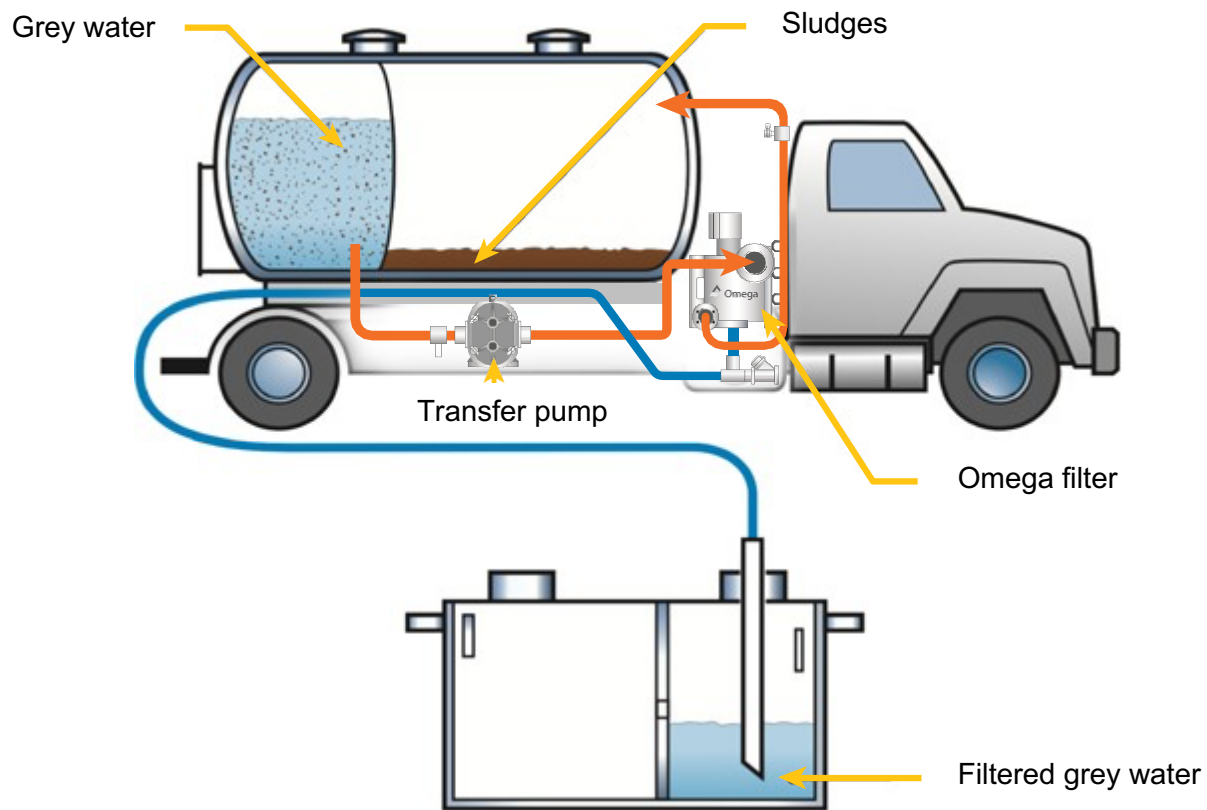

The Omega filtration unit is easy to access.

SEPTIC TANK APPLICATIONS

OMEGA SG-100™ and OMEGA SG-500™ filters are unparalleled at filtering septic tank contents. The filters work continuously at 170 gpm without using chemicals. Return the filtered water back to the septic tank and leave the water behind.

OMEGA SG-100™ and OMEGA SG-500™ filters are the perfect solution to rid septic tanks of high grease and fibre contents, while optimizing disposal and transportation costs.

GREASE TRAP APPLICATIONS


The OMEGA SG-100™ and OMEGA SG-500™ filters are outstanding at cleaning grease traps since you can return up to 80% of the liquid content, which has been purified at 99%. This allows you to work all day without having to empty the truck tank.

With its unique design, the patent pending technology of the OMEGA SG Filter Series create a counter-gyration effect that prevents clogging and operation delays, while providing high quality results every time.



OMEGA Water Recycling Patented Process



100 Microns SST Membrane
640 L/min (170 gpm)



500 Microns SST Membrane
800 L/min (215 gpm)

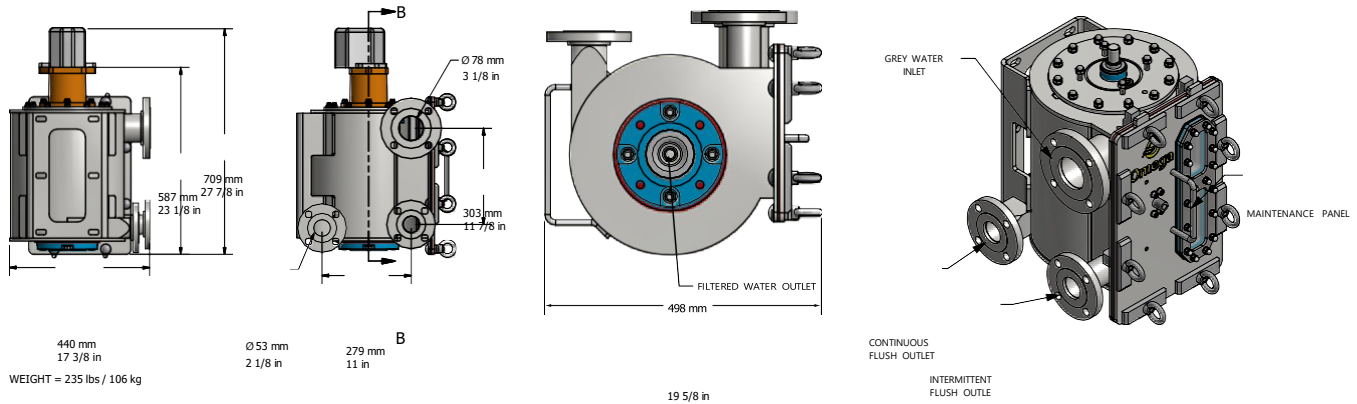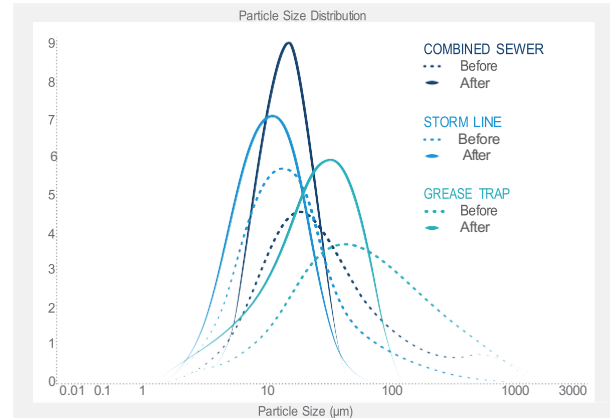

Sample ID and Analysis Results

Type	Location	TSS (mg/l) ¹	VSS (mg/l) ²	Size (µm) ³	Micro ID (Visual scope evaluation)
Combined sewer line	Input	28 000	7 900	205	Quartz sand & gravel, biological debris, filamentous iron bacteria, cellulose, animal hair
Combined sewer line	Output	650	500	27	-----
Storm line	Input	68 000	11 000	60	Quartz sand & gravel, biological debris, filamentous iron bacteria
Storm line	Output	5 300	4 500	24	Quartz sand & gravel, biological debris, few filamentous iron bacteria
Sewer line (high grease content)	Input	11 000	9 200	322	Biological debris, filamentous iron bacteria, distinct hydrogen sulfide odor, cellulose
Sewer line (high grease content)	Output	1 700	1 000	63	Biological debris, filamentous iron bacteria, distinct hydrogen sulfide odor, protozoans

¹ Total suspended solids

² Organic solids (volatile)

³ 90% of particles are less than the size listed



1753 Yvonne-Huot
Levis, (Quebec)
CANADA G7A5N4

Toll Free 888 741 4440
Tel. 418 741 4444
Fax. 418 741 5555

info@omega-lws.com
www.omega-lws.com